



Ice lithography: ice-based nanopatterning

Tiddi, William

Publication date:
2017

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Tiddi, W. (2017). *Ice lithography: ice-based nanopatterning*. Abstract from Nordic Nanolab User Meeting 2017, Trondheim, Norway.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Ice lithography: ice-based nanopatterning

W. Tidti, DTU Danchip-CEN, Technical University of Denmark

wiltid@dtu.dk

Almost any micro- and nanostructure, the building blocks of modern electronics, requires one and generally several lithography iterations where the desired features are defined in a sacrificial layer (resist) used in further processing. This is typically done using UV light, but to overcome diffraction limits collimated electron beams are used to resolve nanometric resolution. A typical lithography process requires multiple different tools, engineered materials and abundant solvents to create, develop, and then remove the thin resist film on the desired substrate.

Ice lithography is a novel technique which doesn't suffer from these limitations. The role of resist is taken by water, deposited directly inside the electron beam chamber on a cooled substrate to create a thin ice film to be patterned [1]. No harmful chemicals or other tools are needed. Sub-20 nm resolution was demonstrated, even on non-planar or fragile substrates which are impossible for conventional techniques [2]. An in-situ metallization process allows using the patterned ice to create seed layers for further processing or one-step nanodevice fabrication [3].

Here at DTU, we recreated an ice lithography setup and took this promising technology a step further. A scanning electron microscope was modified for cryogenic operations and ice deposition (Fig.1) and can now be used to research applications in advanced nanopatterning and nanofabrication using a variety of ices as resist.

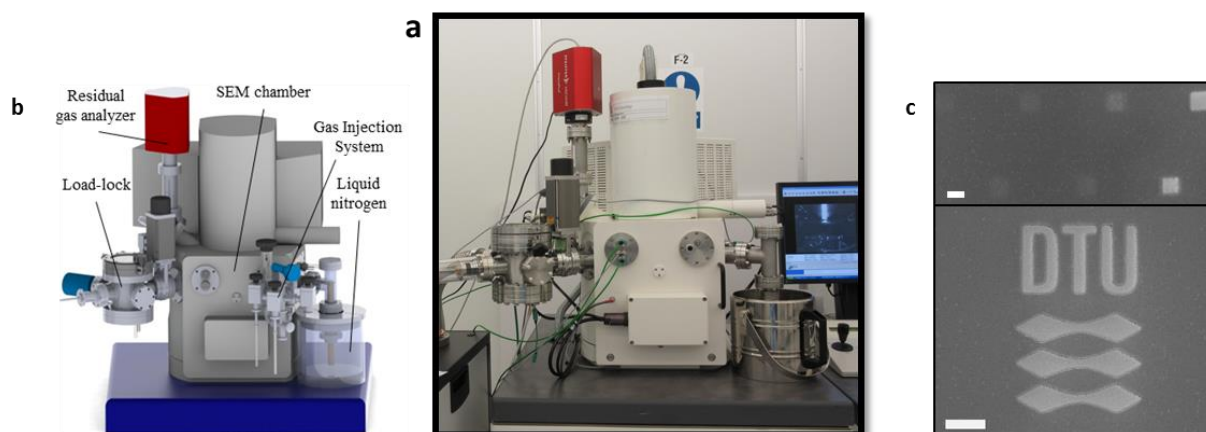


Figure 1 – Ice lithography at DTU Danchip. The modified SEM for ice lithography (a) and the original 3D model (b) used to design the custom parts. By progressively increasing the electrons delivered per unit area (c, top), the optimal dose is identified and used to reproduce arbitrary patterns on 100 nm ice films (c, bottom). Scale bars in (c) are 1 μm .

[1] King, G.M. et al., 2005. *Nano Letters*, 5 (6), 1157–1160.

[2] Han, A. et al., 2012. *Nano Letters*, 12 (2), 1018–1021.

[3] Han, A. et al., 2010. *Nano Letters*, 10 (12), 5056–5059.